

DATA SHEETS
(RETURN TO RED BINDERS)

HP 8360 Series Synthesized Sweeper

Technical Data

10 MHz to 110 GHz



Frequency

Specifications describe warranted instrument performance over the 0 to 55°C temperature range, except as noted otherwise. Specifications apply after Full User Calibration, and in coupled attenuator mode of operation (ALC level greater than -10 dBm). Supplemental characteristics, denoted typical or nominal, are intended to provide information useful in applying the instrument, but are non-warranted parameters.

Range

HP 83620A: 10 MHz to 20 GHz
HP 83622A: 2 GHz to 20 GHz
HP 83623A: 10 MHz to 20 GHz High Power
HP 83624A: 2 GHz to 20 GHz High Power
HP 83630A: 10 MHz to 26.5 GHz
HP 83640A: 10 MHz to 40 GHz
HP 83650A: 10 MHz to 50 GHz

Resolution

Standard: 1 kHz
Option 008: 1 Hz

Frequency Bands
(for CW signals)¹:

HP 83620A, 83622A, 83623A, 83624A, 83640A

Band	Frequency Range	n
0	10 MHz to <2.3 GHz	1
1	2.3 GHz to <7 GHz	1
2	7 GHz to <13.5 GHz	2
3	13.5 GHz to 20 GHz	3
4	>20 GHz to <25.5 GHz	4
5	25.5 GHz to <32 GHz	6
6	32 GHz to 40 GHz	6

HP 83630A, 83650A

Band	Frequency Range	n
0	10 MHz to <2 GHz	1
1	2 GHz to <7 GHz	1
2	7 GHz to <13.5 GHz	2
3	13.5 GHz to 20 GHz	3
4	>20 GHz to <26.5 GHz	4
5	26.5 GHz to <33.4 GHz	6
6	33.4 GHz to <38 GHz	6
7	38 GHz to 50 GHz	8

Accuracy: Same as time base

CW and Manual Sweep Modes

Internal 10 MHz Time Base

Accuracy

Calibration ± Aging Rate ± Temperature Effects ± Line Voltage Effects

Stability

Aging Rate: 5×10^{-10} /day, 1×10^{-7} /year

With Temperature: $1 \times 10^{-10}/^{\circ}\text{C}$, typical

With Line Voltage: 5×10^{-10} for line voltage change of 10%, typical

Switching Time

For Steps Within a Frequency Band: 15 ms + 5 ms/GHz step size

Maximum, or Across Band Switch Points: 70 ms

Step or List Modes (steps ≤100 MHz within a frequency band): 5 ms

¹ In models with a lower frequency limit of 2 GHz, band 0 does not exist and band 1 begins at 2.0 GHz.

Swept Mode**HP 83620A, 83622A, 83623A, 83624A, 83640A****Accuracy** (sweep time ≥ 100 ms and ≤ 5 s)**Upper Frequencies ≤ 20 GHz**Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracySweep Widths $> n \times 10$ MHz and ≤ 300 MHz: 1% of sweep widthSweep Widths > 300 MHz and ≤ 3 GHz: 3 MHzSweep Widths > 3 GHz: 0.1% of sweep width**Upper Frequencies > 20 GHz**Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracySweep Widths $> n \times 10$ MHz and ≤ 600 MHz: 1% of sweep widthSweep Widths > 600 MHz and ≤ 6 GHz: 6 MHzSweep Widths > 6 GHz: 0.1% of sweep width**HP 83630A, 83650A****Accuracy** (sweep time ≥ 100 ms and ≤ 5 s)**Upper Frequencies ≤ 26.5 GHz**Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracySweep Widths $> n \times 10$ MHz and ≤ 300 MHz: 1% of sweep widthSweep Widths > 300 MHz and ≤ 4 GHz: 4 MHzSweep Widths > 4 GHz: 0.1% of sweep width**Upper Frequencies > 26.5 GHz**Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracySweep Widths $> n \times 10$ MHz and ≤ 800 MHz: 1% of sweep widthSweep Widths > 800 MHz and ≤ 8 GHz: 8 MHzSweep Widths > 8 GHz: 0.1% of sweep width**Sweep Time:** 10 ms to 100 seconds, 300 MHz/ms maximum rate**RF Output****Output Power**


Maximum Leveled (dBm) ²	Standard	Option 006
HP 83620A, 83622A	+10	+13
HP 83623A	+17	
HP 83624A	+20	
HP 83630A		
Output Frequencies < 20 GHz	+13	
Output Frequencies ≥ 20 GHz	+4	
HP 83640A		
Output Frequencies < 13.5 GHz	+7	+10
Output Frequencies ≥ 13.5 GHz and ≤ 20 GHz	+2	+7
Output Frequencies > 20 GHz	+2	+2
HP 83650A		
Output Frequencies < 20 GHz	+7	
Output Frequencies ≥ 20 GHz and < 26.5 GHz	+4	
Output Frequencies ≥ 26.5 GHz and < 40 GHz	+3	
Output Frequencies > 40 GHz	0	

Option 001: Lowers maximum leveled output power by 1.5 dB to 20 GHz, 2.0 dB above 20 GHz, and 2.5 dB above 40 GHz.

Minimum Settable

Standard: -20 dBm Option 001: -110 dBm

Resolution: 0.02 dB**Switching Time** (without attenuator change): 10 ms, typical**Temperature Stability:** 0.01 dB/ $^{\circ}$ C, typical² Specification applies over the 0 to 35 $^{\circ}$ C temperature range (0 to 25 $^{\circ}$ C for output frequencies > 20 GHz). Maximum leveled output power over the 35 to 55 $^{\circ}$ C temperature range typically degrades by less than 2 dB.

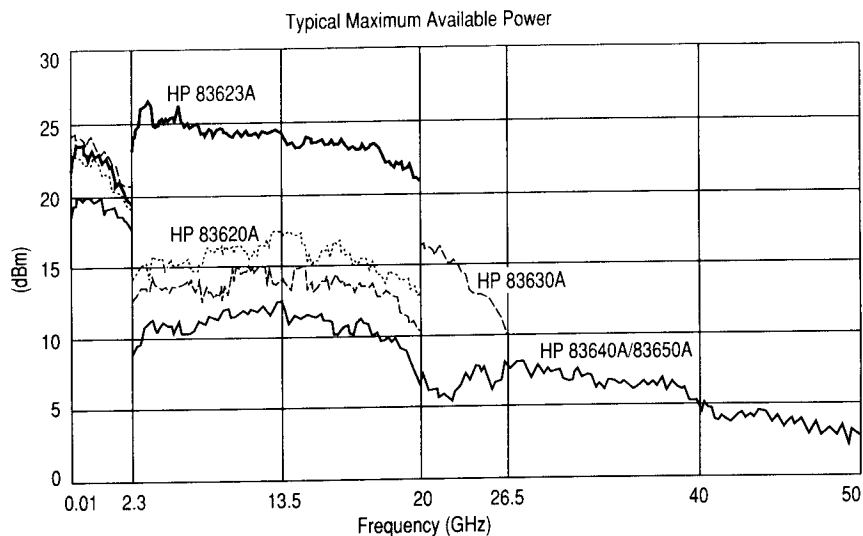

Accuracy (dB)³:

	HP 83620A HP 83622A	HP 83623A HP 83624A	HP 83630A	HP 83640A	HP 83650A
Output Frequencies <2.3 GHz					
Power Levels >+10 dBm	±1.2	±1.2	±1.2	±1.4	±1.2
Power Levels >-10 dBm ⁴	±0.6	±0.6	±0.6	±0.8	±0.6
Power Levels >-60 dBm	±0.9	±0.9	±0.9	±1.0	±0.9
Power Levels ≤-60 dBm	±1.4	±1.4	±1.4	±1.6	±1.4
Output Frequencies ≥2.3 GHz and ≤20 GHz					
Power Levels >+10 dBm	±1.3	±1.3	±1.3	±1.3	±1.3
Power Levels >-10 dBm ⁴	±0.7	±0.7	±0.7	±0.7	±0.7
Power Levels >-60 dBm	±1.0	±1.0	±1.0	±1.0	±1.0
Power Levels ≤-60 dBm	±1.5	±1.5	±1.5	±1.5	±1.5
Output Frequencies >20 GHz and ≤40 GHz					
Power Levels >+10 dBm					
Power Levels >-10 dBm ⁴			±0.9	±0.9	±0.9
Power Levels >-60 dBm			±1.2	±1.2	±1.2
Power Levels ≤-60 dBm			±1.7	±1.7	±1.7
Output Frequencies >40 GHz					
Power Levels >-10 dBm ⁴					±1.7
Power Levels >-60 dBm					±2.0
Power Levels ≤-60 dBm					±2.5


³ Specifications apply over the 15 to 35°C temperature range for output frequencies <50 MHz. In models with a lower frequency limit of 2 GHz, specifications <2.3 GHz do not apply, and specifications ≥2.3 to ≤20.0 GHz apply over the range ≥2.0 to ≤20.0 GHz.

⁴ Specifications apply over the 15 to 35°C temperature range and are degraded 0.3 dB outside of that range.

Flatness (dB):

	HP 83620A HP 83622A	HP 83623A HP 83624A	HP 83630A	HP 83640A	HP 83650A
Output Frequencies					
<2.3 GHz					
Power Levels >+10 dBm	±0.9	±0.9	±0.9	±1.3	±0.9
Power Levels >-10 dBm	±0.5	±0.5	±0.5	±0.7	±0.5
Power Levels >-60 dBm	±0.7	±0.7	±0.7	±0.9	±0.7
Power Levels ≤-60 dBm	±1.1	±1.1	±1.1	±1.3	±1.1
Output Frequencies					
≥2.3 GHz and ≤20 GHz					
Power Levels >+10 dBm	±1.0	±1.0	±1.0	±1.0	±1.0
Power Levels >-10 dBm	±0.6	±0.6	±0.6	±0.6	±0.6
Power Levels >-60 dBm	±0.8	±0.8	±0.8	±0.8	±0.8
Power Levels ≤-60 dBm	±1.2	±1.2	±1.2	±1.2	±1.2
Output Frequencies					
>20 GHz and ≤40 GHz					
Power Levels >+10 dBm					
Power Levels >-10 dBm			±0.8	±0.8	±0.8
Power Levels >-60 dBm			±1.0	±1.0	±1.0
Power Levels ≤-60 dBm			±1.4	±1.4	±1.4
Output Frequencies					
>40 GHz					
Power Levels >-10 dBm					±1.5
Power Levels >-60 dBm					±1.7
Power Levels ≤-60 dBm					±2.1

Typical HP 83640A Power Flatness

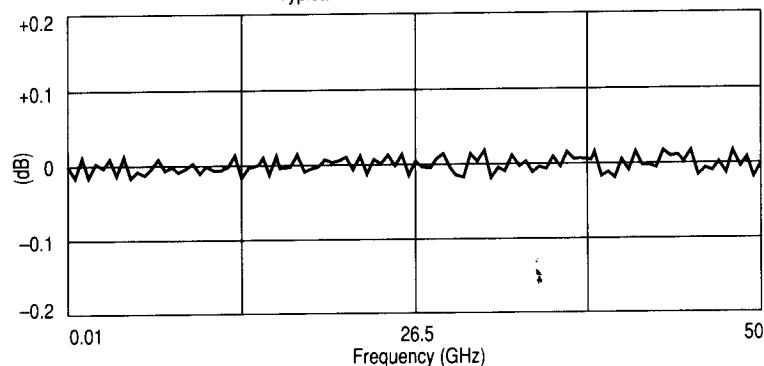**Analog Power Sweep****External Leveling****Source Match**

Range: -20 dBm to maximum available power, can be offset using step attenuator.

Range

At External HP 33330D/E Detector: -36 to +4 dBm

At External Leveling Input: -200 μ V to -0.5 volts

Bandwidth

External Detector Mode: 10 or 100 kHz (sweep speed and modulation mode dependent), nominal

Power Meter Mode: 0.7 Hz, nominal

(internally leveled), typical⁵


<20 GHz 1.3:1 SWR

<40 GHz 1.8:1 SWR

<50 GHz 2.0:1 SWR

⁵ Typically 1.8:1 SWR at frequencies below 2.3 GHz in HP 83640A.

Typical ALC Linearity
(Frequencies ≤ 20 GHz)

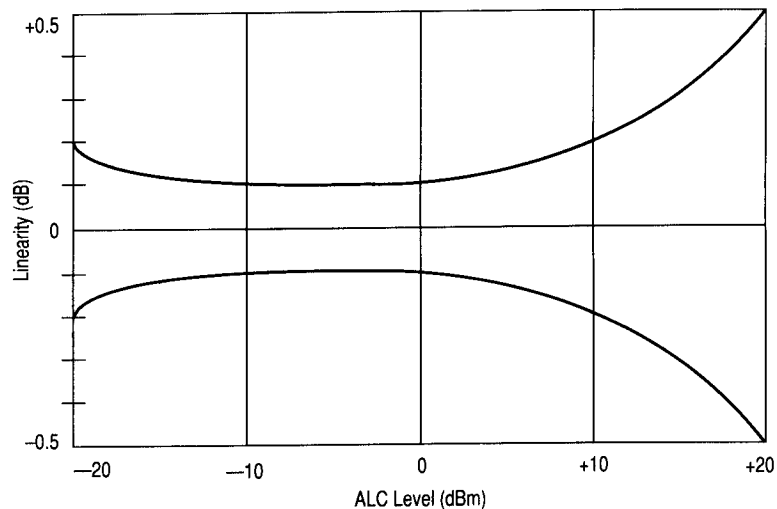

Spectral Purity


Spurious Signals (dBc)

Specifications apply in CW, Step, List, and Manual Sweep Modes of operation.


Harmonics

	HP 83620A HP 83622A	HP 83623A HP 83624A	HP 83630A	HP 83640A	HP 83650A
Output Frequencies					
<1.8 GHz					
Standard	-35	-25 ⁶	-35	-30 ⁶	-35 ⁶
Option 006	-25			-25 ⁶	
Output Frequencies					
≥ 1.8 GHz					
Standard	-50	-25	-50	-50	-50
Option 006	-20			-20	

Typical HP 83620A Harmonics & Subharmonics

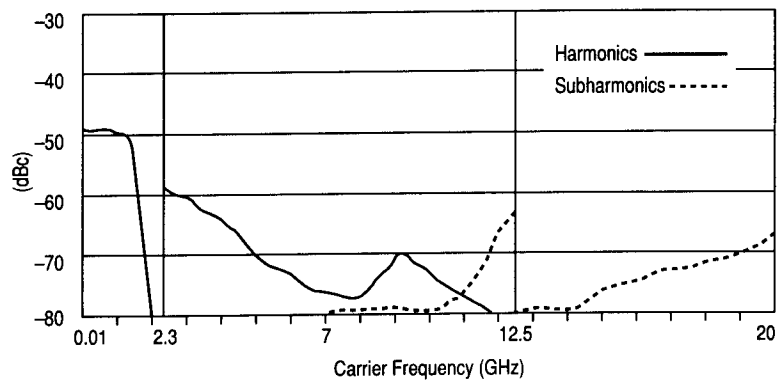

⁶ Specification is degraded 5 dB below 50 MHz.

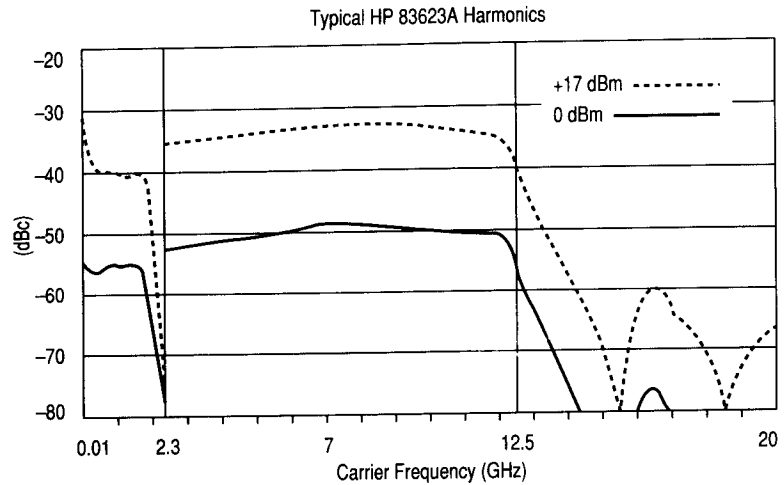

Subharmonics

	HP 83620A HP 83622A	HP 83623A HP 83624A	HP 83630A	HP 83640A	HP 83650A
Output Frequencies <7 GHz	None	None	None	None	None
Output Frequencies ≥7 and ≤20 GHz	-50	-50	-50	-50	-50
Output Frequencies >20 GHz and ≤40 GHz			-50	-40	-40
Output Frequencies >40 GHz					-35

Non-Harmonically Related

Output Frequencies <2.3 GHz ⁷	-60	-60	-60	-54	-60
Output Frequencies ≥2.3 and <20 GHz	-60	-60	-60	-60	-60
Output Frequencies ≥20 and <40 GHz			-58	-54	-54
Output Frequencies ≥40 GHz					-52


Power-Line-Related (<300 Hz offset from Carrier)

Bands 0,1:	-55
Band 2:	-49
Band 3:	-45
Band 4:	-43
Bands 5,6:	-39
Band 7:	-37

Single-Sideband Phase Noise (dBc/Hz)

Offset from Carrier Band(s)	100 Hz	1 kHz	10 kHz	100 kHz
0,1	-70	-78	-86	-107
2	-64	-72	-80	-101
3	-60	-68	-76	-97
4	-58	-66	-74	-95
5,6	-54	-62	-70	-91
7	-52	-60	-68	-89

⁷ Specification applies at output levels 0 dBm and below.

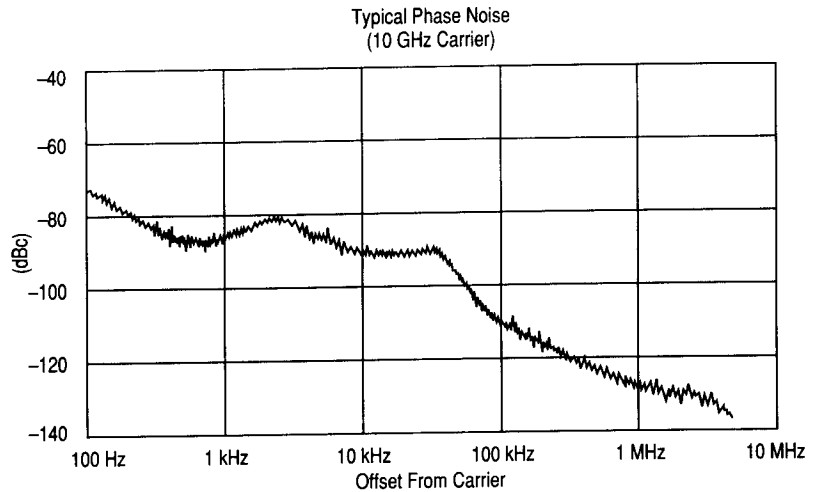

Residual FM
(RMS, 50 Hz to 15 kHz bandwidth)

CW Mode or Sweep Widths $\leq n \times 10$ MHz: $n \times 60$ Hz, typical
Sweep Widths $> n \times 10$ MHz: $n \times 1$ kHz, typical

Modulation

Pulse

HP 83620A, 83623A, 83624A, 83640A

Pulse modulation specifications apply for output frequencies 400 MHz and above.

	Standard	Option 006
On/Off Ratio	80 dB ⁸	80 dB
Rise/Fall Times	50 ns	10 ns
Minimum Width		
Internally Leveled	1 μ s	1 μ s
Unleveled		
Output Frequencies < 2.3 GHz	50 ns	50 ns
Output Frequencies ≥ 2.3 GHz	100 ns	20 ns
Minimum Repetition Frequency		
Internally Leveled	10 Hz	10 Hz
Unleveled	DC	DC
Level Accuracy (dB, relative to CW level)		
Widths ≥ 1 μ s	± 0.3 , leveled	± 0.3 , leveled
Widths < 1 μ s (Search Mode)	± 0.5 , typical	± 0.5 , typical
Video Feedthrough		
Output Frequencies < 2.3 GHz		
Power Levels ≤ 10 dBm	2%	2%
Power Levels > 10 dBm	5%	5%
Output Frequencies		
≥ 2.3 GHz and ≤ 20 GHz	2 mV	20 mV
Output Frequencies > 20 GHz	0.3%	2%
Overshoot, Ringing	15%, typical	10%, typical
Delay⁹		
Output Frequencies < 2.3 GHz	65 ns, typical	65 ns, typical
Output Frequencies ≥ 2.3 GHz	95 ns, typical	30 ns, typical
Compression	± 10 ns, typical	± 5 ns, typical


⁸In the HP 83623A/83624A, specification applies at ALC levels 0 dBm and above, and over the 20 to 55 degree C temperature range. Specification degrades 5 dB below 20 degree C, and 1 dB per dB below ALC level 0 dBm in those models.

Pulse HP 83630A,83650A

	Standard
On/Off Ratio	80 dB
Rise/Fall Times	25 ns
Minimum Width	
Internally Leveled	1 μ s
Unleveled	
Output Frequencies <2 GHz	50 ns
Output Frequencies $\geq$ 2 GHz	100 ns
Minimum Repetition Frequency	
Internally Leveled	10 Hz
Unleveled	DC
Level Accuracy	
(dB, relative to CW level)	
Widths $\geq$ 1 μ s	$\pm$ 0.3, leveled
Widths <1 μ s (Search Mode)	$\pm$ 0.5, typical
Video Feedthrough	
Output Frequencies <2 GHz	
Power Levels $\leq$ 10 dBm	2%
Power Levels >10 dBm	5%
Output Frequencies	
$\geq$ 2 GHz and $\leq$ 26.5 GHz	2 mv
>26.5 GHz and $\leq$ 50 GHz	0.3%
Overshoot, Ringing	15%, typical
Delay⁹	
Output Frequencies <2 GHz	65 ns, typical
Output Frequencies $\geq$ 2 GHz	95 ns, typical
Compression	$\pm$ 10 ns, typical

Internal Pulse GeneratorWidth Range: 1 μ s to 65 msPeriod Range: 2 μ s to 65 msResolution: 1 μ s

Typical Option 006 Pulse Envelope

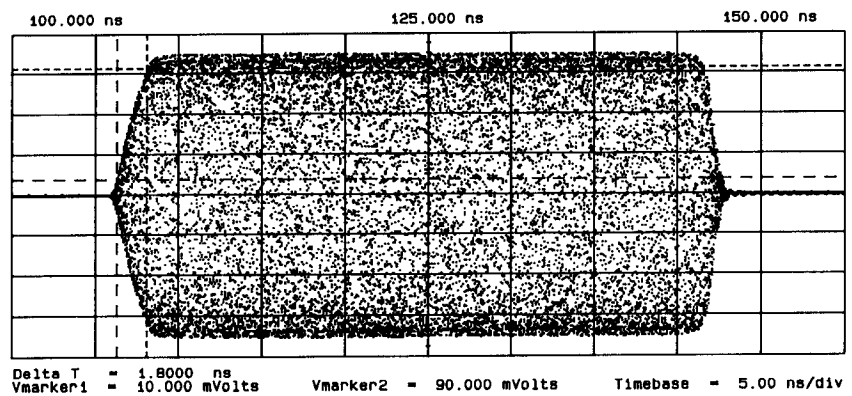⁹ Option 002 adds 30 ns delay.

AM and Scan

Bandwidth (3 dB): DC to 100 kHz

Dynamic Range

(ALC levels noted, can be offset using step attenuator)

Normal Mode: -20 dBm to 1 dB below maximum available power

Deep Mode¹⁰: -50 dBm to 1 dB below maximum available power

Unleveled Mode¹¹: -50 dBm to 1 dB below maximum available power

Sensitivity

Linear: 100%/volt



Accuracy (1 kHz rate, 30% depth): 5%

Exponential: 10 dB/volt

Accuracy: 0.25 dB $\pm$ 5% of depth in dB

Incident Phase Modulation: 0.2 radians peak, typical

Incident FM: Incident phase modulation $\times$ modulation rate, typical

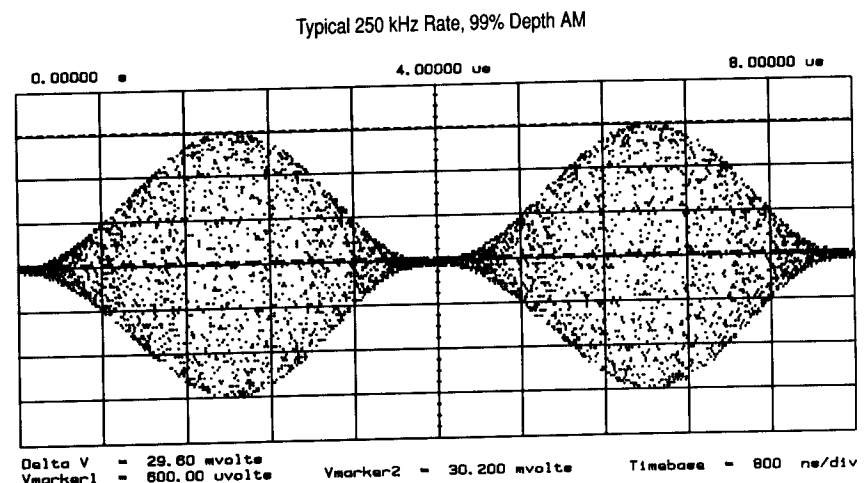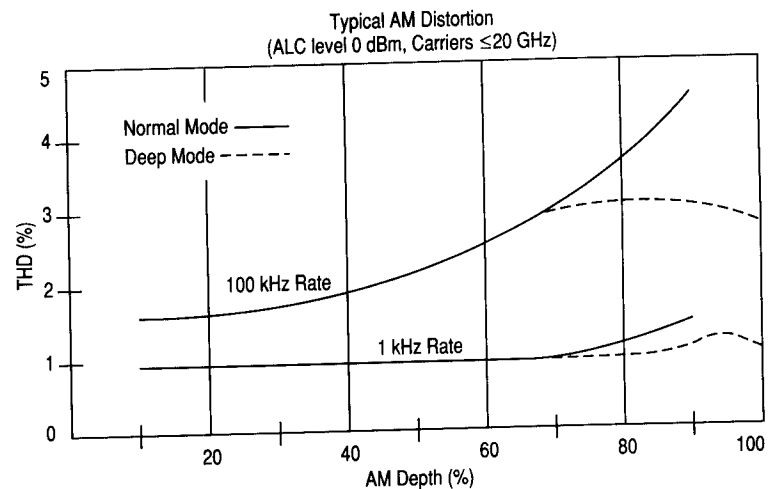

¹⁰ Deep mode offers reduced distortion for very deep AM. Waveform is DC-coupled and feedback-leveled at ALC levels above -13 dBm. At ALC levels below -13 dBm, output is DC-controllable, but subject to typical sample-and-hold drift of 0.25 dB/second.

¹¹ The HP 8360 has two unleveled modes, ALC Off and Search. In ALC Off mode, the modulator drive can be controlled from the front panel to vary quiescent RF output level. In Search mode, the instrument microprocessor momentarily closes the ALC loop to find the modulator drive setting necessary to make the quiescent RF output level equal an entered value, then opens the ALC loop while maintaining that modulator drive setting. Neither of these modes is feedback leveled.

FM**Locked Mode**Maximum Deviation: ± 8 MHz

Rates (6 dB bandwidth, 1 MHz deviation): 50 kHz to 10 MHz

Maximum Modulation Index (deviation/rate): $n \times 5$ **Unlocked Mode**

Maximum Deviation

At rates ≤ 100 Hz: ± 75 MHzAt Rates > 100 Hz: ± 8 MHz

Rates (6 dB bandwidth, 1 MHz deviation): DC to 10 MHz

Sensitivity

100 kHz, 1 MHz, or 10 MHz/volt, switchable.

Accuracy (1 MHz rate, 1 MHz deviation): 10%

**Simultaneous
Modulations**

Full AM bandwidth and depth is typically available at any pulse rate or width. FM is completely independent of AM and pulse modulation.

General**Environmental****Operating Temperature Range:** 0 to 55° C**EMC:** Within limits of VDE 0871/6.78 Level B, FTZ 1046/1984, and Mil-Std-461B Part 7 RE02**Warm-Up Time****Operation:** Requires 30 minute warm-up from cold start at 0 to 55° C. Internal temperature equilibrium reached after 2 hour warm-up at stable ambient temperature.**Frequency Reference:** Reference time base is kept at operating temperature with the instrument connected to AC power. Instruments disconnected from AC power for more than 24 hours require 30 days to achieve time base aging specification. Instruments disconnected from AC power for less than 24 hours require 24 hours to achieve time base aging specification.
Power Requirements**Power Requirements**

48 to 66 Hz; 115 volts (+10/-25%) or 230 volts (+10/-15%); 400 VA maximum (30 VA in STANDBY)

**Weight &
Dimensions**

Net Weight: 27 kg (60 lb)

Shipping Weight: 36 kg (80 lb)

Dimensions: 178 H x 425 W x 648 mm D (7.0 x 16.75 x 25.5 inches)

Adapters Supplied**HP 83620A, 83622A, 83623A, 83624A, 83630A**

Type N (female) - 3.5mm (female)

Part Number 1250-1745

3.5mm (female) - 3.5mm (female)

Part Number 5061-5311

HP 83640A, 83650A

2.4mm (female) - 2.92mm (female)

Part Number 1250-2187

2.4mm (female) - 2.4mm (female)

Part Number 1250-2188

Inputs & Outputs

RF Output

Nominal output impedance 50 ohms. (Precision 3.5 mm male on 20 GHz models, 2.4 mm male on 40 GHz models, front panel.)

External ALC Input

Used for negative external detector or power meter leveling. Nominal input impedance 100 kohms, damage level ± 15 volts. See RF Output specifications. (BNC female, front panel.)

Pulse Input/Output

TTL-low-level signal turns RF off. When using internal pulse generator, a TTL-level pulse sync signal preceeding the RF pulse by nominally 80 ns is output at this connector. Nominal input impedance 50 ohms, damage level +5.5, -0.5 volts. See Modulation specifications. (BNC female, front panel.)

AM Input

Nominal input impedance 50 ohms (internally switchable to 2 kohms), damage level ± 15 volts. See Modulation specifications. (BNC female, front panel.)

FM Input

Nominal input impedance 50 ohms (internally switchable to 600 ohms), damage level ± 15 volts. See Modulation specifications. (BNC female, front panel.)

Trigger Input

Activated on a TTL rising edge. Used to externally initiate an analog sweep or to advance to the next point in step or list mode. Damage level +5.5, -0.5 volts. (BNC female, rear panel.)

Trigger Output

Outputs a one-microsecond-wide TTL-level pulse at 1601 points evenly spaced across an analog sweep, or at each point in step or list mode. (BNC female, rear panel.)

10 MHz Reference Input

Accepts 10 MHz ± 100 Hz, 0 to +10 dBm reference signal for operation from external time base. Nominal input impedance 50 ohms. Damage level +10, -5 volts. (BNC female, rear panel.)

10 MHz Reference Output

Nominal signal level 0 dBm, nominal output impedance 50 ohms. (BNC female, rear panel.)

Sweep Output

Supplies a voltage proportional to the sweep ranging from 0 volts at start of sweep to +10 volts at end of sweep, regardless of sweep width. In CW mode, voltage is proportional to percentage of full instrument frequency range. Minimum load impedance 3 kohms. Accuracy $\pm 0.25\%$, ± 10 mv, typical. (BNC female, rear panel.)

Stop Sweep Input/Output

Sweep will stop when grounded externally. TTL-high while sweeping, TTL-low when HP 8360 stops sweeping. Damage level +5.5, -0.5 volts. (BNC female, rear panel.)

Z-Axis Blanking/Markers Output

Supplies positive rectangular pulse (approximately +5 volts into 2 kohms) during the retrace and band switchpoints of the RF output. Also supplies a negative pulse (-5 volts) when the RF is at a marker frequency (intensity markers only). (BNC female, rear panel.)

Volts/GHz Output

Supplies voltage proportional to output frequency at 0.5 volts/GHz (internally switchable to 0.25 or 1 volt/GHz). Maximum output 18 volts. Minimum load impedance 2 kohms. Accuracy $\pm 0.5\%$, ± 10 mv, typical. (BNC female, rear panel.)

Source Module Interface

Provides bias, flatness correction, and leveling connections to HP 83550-series millimeter-wave Source Modules. (Special, front and rear panels.)

Inputs & Outputs

(continued)

Auxiliary Interface

Provides control signal connections to HP 8516A S-parameter Test Set. (25-pin D-subminiature receptacle, rear panel.)

Pulse Video Output (Option 002 only.)

Outputs the pulse modulation waveform that is supplied to the modulator. This can be either the internally/externally generated pulse modulation signal.

Pulse Sync Out (Option 002 only.)

Outputs a 50 ns wide TTL pulse synchronized to the leading edge of the internally-generated pulse.

AM/FM Output (Option 002 only.)

Outputs the internally-generated AM or FM waveform. This output can drive 50 ohms or greater. The AM output is scaled the same as it is generated, either 100%/V or 10 dB/V. The FM scaling depends on the FM deviation selected.

Models

HP 83620A	10 MHz to 20 GHz
HP 83622A	2 to 20 GHz
HP 83623A	10 MHz to 20 GHz High Power
HP 83624A	2 to 20 GHz High Power
HP 83630A	10 MHz to 26.5 GHz
HP 83640A	10 MHz to 40 GHz
HP 83650A	10 MHz to 50 GHz

Options

Option 001 Add Step Attenuator

With this option, minimum settable output power is -110 dBm. Maximum leveled output power is lowered by 1.5 dB to 20 GHz, 2.0 dB above 20 GHz, and 2.5 dB above 40 GHz.

Option 002 Add Internal Modulation Generator

Adds a digitally-synthesized modulation waveform source-on-a-card to the HP 8360. It provides signals that would otherwise be supplied to the external modulation inputs.

Option 003 Delete Keyboard/Display

For security, tamper-resistance, and cost savings in automated system applications, this option deletes the keyboard and display. Option 003 does NOT move the front panel connectors to the rear panel, however, so in most cases Option 004 should be ordered in conjunction with Option 003.

Option 004 Rear Panel RF Output

Moves RF Output, External ALC Input, Pulse Input/Output, AM Input, and FM Input connectors to the rear panel. Option 006 Fast Pulse Modulation improves pulse rise/fall time to 10 ns. Also effects maximum leveled output power and harmonic performance. Not available on the HP 83623A and HP 83624A.

Option 008 1 Hz Frequency Resolution

Provides frequency resolution of 1 Hz.

Option 700 MATE System Compatibility

Provides CIIL programming commands for MATE system compatibility.

Option 806 Rack Slide Kit

Used to rack mount HP 8360 while permitting access to internal spaces.

Option 908 Rack Flange Kit

Used to rack mount HP 8360 without front handles.

Option 910 Extra Operating & Service Manuals

Provides a second copy of Operating and Service manuals.

Option 913 Rack Flange Kit

Used to rack mount HP 8360 with front handles. Front handles are standard on the HP 8360

Option W30 Two Years Additional Return-To-HP Service

Does not include bi-annual calibration.

Dedicated HP 8510 System Source Models

Dedicated source are optimized for use as HP 8510 system components. They are configured without modulation capabilities or front panel keyboard/displays, and with rear connectors and with one-year on-site service (where available). Specifications for these models are the HP 8510 specifications, plus the following:

Frequency

Range

HP 83621A: 45 MHz to 20 GHz

HP 83631A: 45 MHz to 26.5 GHz

HP 83651A: 45 MHz to 50 GHz

Resolution: 1 Hz

Accuracy

CW Mode: Same as time base¹²

Swept Mode:

At frequencies ≤ 26.5 GHz

Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracy

Sweep Widths $> n \times 10$ MHz and ≤ 400 MHz: 1% of sweep width Sweep

Widths > 400 MHz and ≤ 4 GHz: 4 MHz

Sweep Widths > 4 GHz: 0.1% of sweep width

At frequencies > 26.5 GHz

Sweep Widths $\leq n \times 10$ MHz: 0.1% of sweep width $\pm$ time base accuracy

Sweep Widths $> n \times 10$ MHz and ≤ 800 MHz: 1% of sweep width Sweep

Widths > 800 MHz and ≤ 8 GHz: 8 MHz

Sweep Widths > 8 GHz: 0.1% of sweep width

Output Power

Maximum Leveled

Frequencies ≤ 20 GHz: +10 dBm

Frequencies > 20 GHz and ≤ 26.5 GHz: +4 dBm

Frequencies > 26.5 GHz and ≤ 40 GHz: +3 dBm

Frequencies > 40 GHz: 0 dBm

Minimum Settable: -20 dBm

¹² Internal time base verified to 1 ppm with standard on-site verification procedure.

For more information, call your local HP sales office listed in your telephone directory.

For more information, call your local HP sales office listed in your telephone directory or an HP regional office listed below for the location of your nearest sales office.

United States:

Hewlett-Packard Company
4 Choke Cherry Road
Rockville, MD 20850
(301) 670 4300

Hewlett-Packard Company
5201 Tollview Drive
Rolling Meadows, IL 60008
(312) 255 9800

Hewlett-Packard Company
5161 Lankershim Blvd.
No. Hollywood, CA 91601
(818) 505 5600

Hewlett-Packard Company
2015 South Park Place
Atlanta, GA 30339
(404) 955 1500

Canada:

Hewlett-Packard Ltd.
6877 Goreway Drive
Mississauga, Ontario L4V 1M8
(416) 678 9430

Japan:

Yokogawa-Hewlett-Packard Ltd.
15-7, Nishi Shinjuku 4 Chome
Shinjuku-ku, Tokyo 160, Japan
(03) 5371 1351

Latin America:

Hewlett-Packard
Latin American Region Headquarters
Monte Pelvoux No. 111
Lomas de Chapultepec
11000 Mexico, D.F. Mexico
(525) 202 0155

Australia/New Zealand:

Hewlett-Packard Australia Ltd.
31-41 Joseph Street
Blackburn, Victoria 3130
Melbourne, Australia
(03) 895 2895

Far East:

Hewlett-Packard Asia Ltd.
22/F Bond Centre, West Tower
89 Queensway, Central, Hong Kong
(5) 8487777

In Europe, please call your local HP sales office or representative:

Austria, COMECON-countries and Yugoslavia:
(0222) 2500 0

Belgium and Luxembourg:
(02) 761 31 11

Denmark:
(02) 81 66 40

Finland:
(0) 88 721

France:
(1) 60 77 42 52

Germany:
(06172) 400 0

Greece:
(01) 68 28 11

Iceland:
(01) 671 000

Ireland:
(01) 88 33 99

Italy:
(02) 92 36 91

Netherlands:
(020) 547 6669

Norway:
(02) 24 60 90

Spain:
900 123 123

Sweden:
(08) 750 20 00

Switzerland:
(057) 31 21 11 (Head office)
(022) 780 41 11 (Suisse Romande)
(046) 05 15 05 (Customer Information Center)

U.K.:
(0734) 777 828

Middle East and Africa:
Geneva-Switzerland
41/22 780 7111

European Headquarters:
Hewlett-Packard S.A.
150, Route du Nant d'Avril
1217 Meyrin 2
Geneva-Switzerland
41/22 780 8111